



**IES INDOOR REPORT
PHOTOMETRIC FILENAME : 390320.IES**

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-1995
[DATE]11/29/98
[TEST]ITL48522
[MANUFAC]LDPI COMPANY DIVISION OF LPI INC.
[LUMCAT]390320
[LUMINAIRE]FABRICATED METAL HOUSING WITH WHITE PAINTED INTERIOR FINISH,
[MORE]WHITE PAINTED FABRICATED METAL BALLAST COVER, CLEAR FLAT GLASS
[MORE]LENS IN EXTRUDED METAL DOOR FRAME.
[LAMP]TWO 25-WATT T-8 F25T8 LINEAR FLUORESCENTS.
[_ MOUNTING]RECESSED
[OTHER]NOTE: THIS REPORT WAS PRORATED FROM ITL TEST NUMBER 48516 WHICH
[MORE]WAS TESTED USING TWO F32T8/TL835, 32-WATT, T-8 LAMPS; ACTUAL
[MORE]PERFORMANCE MAY VARY.
[_ PAINTREFL]85.0 %
[OTHER]THE 0 DEGREE PLANE IS PARALLEL WITH THE LAMPS.

CHARACTERISTICS

Total Rated Lamp Lumens 4450 (2 lamps)
Total Luminaire Efficiency 58.6 %
CIE Type Direct
Spacing Criteria (0-180) 1.28
Spacing Criteria (90-270) 1.30
Spacing Criteria (Diagonal) 1.40
Basic Luminous Shape Rectangular
Luminous Length (0-180) 3.01 ft
Luminous Width (90-270) 0.62 ft
Luminous Height 0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5159	5257	4972
55	4833	4863	4602
65	4146	4050	3778
75	2828	2672	2672
85	727	992	794

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 390320.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-30	750.69	16.9	28.8
0-40	1234.02	27.7	47.4
0-60	2155.38	48.4	82.7
0-90	2605.64	58.6	100
90-120	0	0	0
90-130	0	0	0
90-150	0	0	0
90-180	0	0	0
0-180	2605.64	58.6	100

Total Luminaire Efficiency = 58.6%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	89.65
10-20	260.4
20-30	400.64
30-40	483.33
40-50	492.74
50-60	428.62
60-70	293.57
70-80	134.48
80-90	22.2
90-100	0
100-110	0
110-120	0
120-130	0
130-140	0
140-150	0
150-160	0
160-170	0
170-180	0


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 390320.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	70	70	70	70	68	68	68	68	65	65	65	62	62	62	60	60	60	59
1	64	62	59	57	63	60	58	56	58	56	54	55	54	53	53	52	51	50
2	59	54	50	47	57	53	49	46	51	48	45	49	46	44	47	45	43	42
3	53	48	43	39	52	47	42	39	45	41	38	43	40	38	42	39	37	36
4	49	42	37	33	48	41	37	33	40	36	33	39	35	32	37	34	32	31
5	45	38	33	29	44	37	32	29	36	32	28	35	31	28	34	30	28	26
6	42	34	29	25	41	33	29	25	32	28	25	31	28	25	30	27	24	23
7	39	31	26	22	38	30	26	22	29	25	22	29	25	22	28	24	22	20
8	36	28	23	20	35	28	23	20	27	23	20	26	22	20	26	22	19	18
9	34	26	21	18	33	25	21	18	25	21	18	24	20	18	24	20	17	16
10	31	24	19	16	31	23	19	16	23	19	16	22	19	16	22	18	16	15

POLAR GRAPH

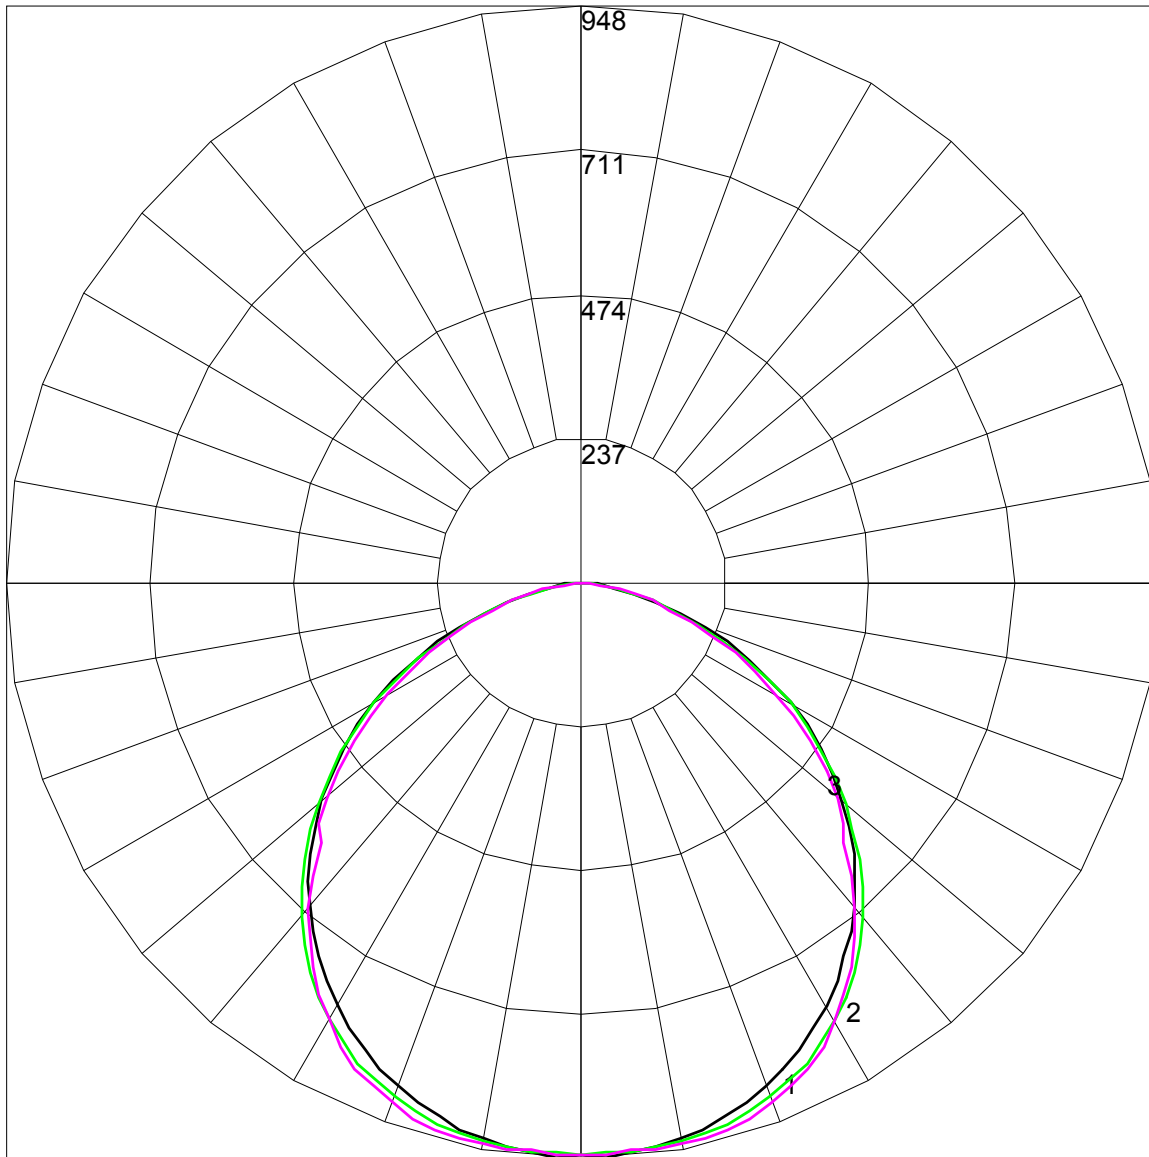

Maximum Candela = 948 Located At Horizontal Angle = 0, Vertical Angle = 2.5

- # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
- # 2 - Vertical Plane Through Horizontal Angles (45 - 225)
- # 3 - Vertical Plane Through Horizontal Angles (90 - 270)