



Photometric Report (Type C)

Filename: HAZ006I.ies

Maximum Candela = 1720 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Semi-Cutoff (deprecated)

Upward Wast Light Ratio: 0.12

Luminaire Efficacy Rating (LER): 8080

Indoor Classification: Semi-Direct

BUG Rating : B3-U4-G4


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

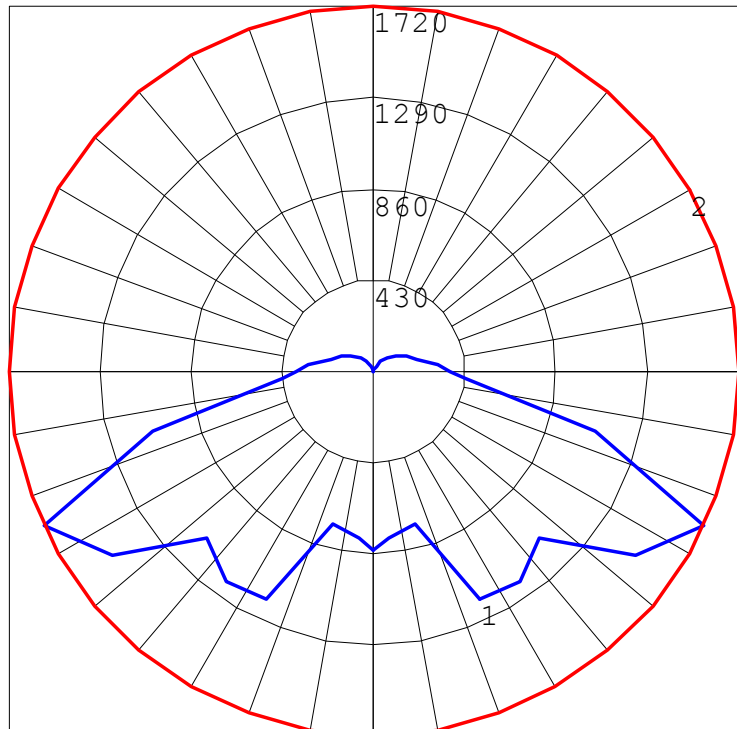

Photometric Report (Type C)

Filename: HAZ006I.ies

Maximum Candela = 1720 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Semi-Cutoff (deprecated)

Upward Waste Light Ratio: 0.12

Luminaire Efficacy Rating (LER): 8080

Indoor Classification: Semi-Direct

BUG Rating : B3-U4-G4

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	264.6	2.8	3.3
FM (30-60)	1286.4	13.5	15.9
FH (60-80)	1486.3	15.6	18.4
FVH (80-90)	518.4	5.5	6.4
BL (0-30)	264.6	2.8	3.3
BM (30-60)	1286.4	13.5	15.9
BH (60-80)	1486.3	15.6	18.4
BVH (80-90)	518.4	5.5	6.4
UL (90-100)	183.5	1.9	2.3
UH (100-180)	784.7	8.3	9.7
Total	8079.6	85.0	100.0
BUG Rating	B3-U4-G4		

