



## Photometric Report (Type C)

Filename: HAZ030I.ies

Maximum Candela = 2303 at 0 H 25 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 10006

Indoor Classification: Direct

BUG Rating : B3-U3-G3


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 25 Vertical

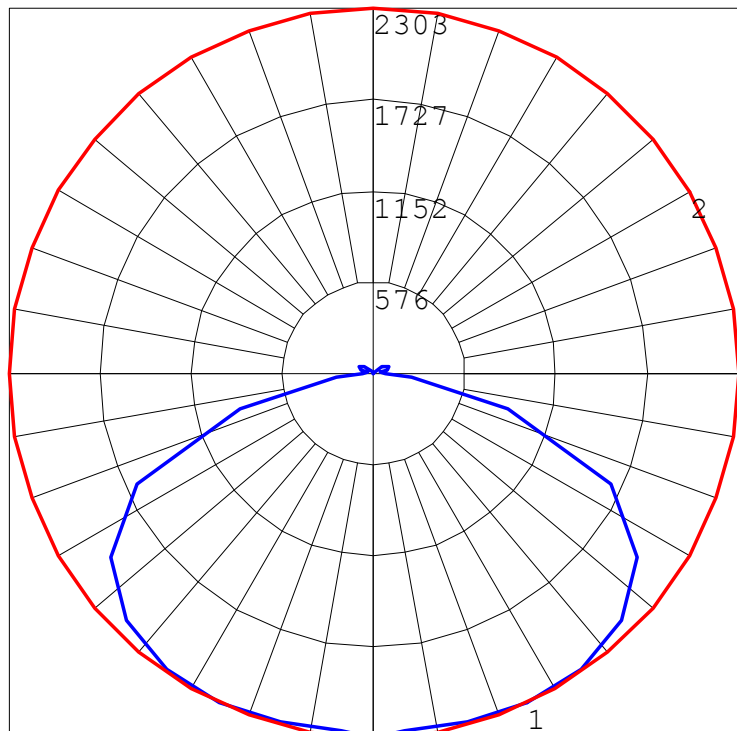



## Photometric Report (Type C)

Filename: HAZ030I.ies

Maximum Candela = 2303 at 0 H 25 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 10006

Indoor Classification: Direct

BUG Rating : B3-U3-G3

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	672.0	4.8	6.7
FM (30-60)	2311.0	16.5	23.1
FH (60-80)	1523.2	10.9	15.2
FVH (80-90)	341.3	2.4	3.4
BL (0-30)	672.0	4.8	6.7
BM (30-60)	2311.0	16.5	23.1
BH (60-80)	1523.2	10.9	15.2
BVH (80-90)	341.3	2.4	3.4
UL (90-100)	30.4	0.2	0.3
UH (100-180)	280.7	2.0	2.8
Total	10006.1	71.4	100.0
BUG Rating	B3-U3-G3		

