



Photometric Report (Type C)

Filename: HAZ105I.ies

Maximum Candela = 1896 at 75 H 65 V

Classification:

Road Classification: Type III, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 6269

Indoor Classification: Semi-Direct

BUG Rating : B2-U4-G4


Polar Candela Curves:

Vertical Plane Through:

1) 75 - 255 Horizontal

Horizontal Cone Through:

2) 65 Vertical

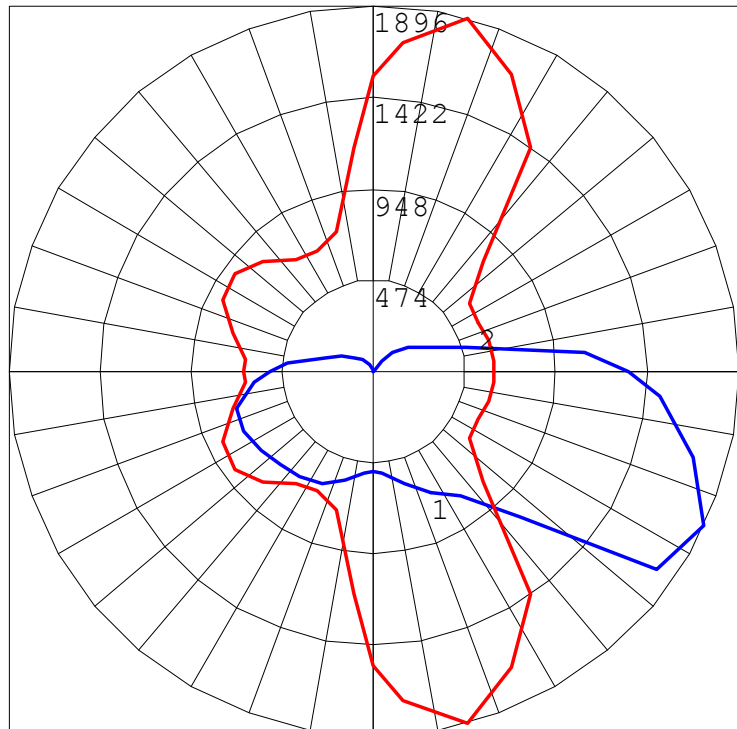



Photometric Report (Type C)

Filename: HAZ105I.ies

Maximum Candela = 1896 at 75 H 65 V

Classification:

Road Classification: Type III, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 6269

Indoor Classification: Semi-Direct

BUG Rating : B2-U4-G4

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	176.0	2.0	2.8
FM (30-60)	824.7	9.4	13.2
FH (60-80)	1059.8	12.0	16.9
FVH (80-90)	727.3	8.3	11.6
BL (0-30)	165.5	1.9	2.6
BM (30-60)	689.9	7.8	11.0
BH (60-80)	785.8	8.9	12.5
BVH (80-90)	524.9	6.0	8.4
UL (90-100)	318.6	3.6	5.1
UH (100-180)	996.6	11.3	15.9
Total	6269.1	71.2	100.0
BUG Rating	B2-U4-G4		

