



Photometric Report (Type C)

Filename: HAZ121I.ies

Maximum Candela = 2891 at 75 H 65 V

Classification:

Road Classification: Type III, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.25

Luminaire Efficacy Rating (LER): 10609

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5


Polar Candela Curves:

Vertical Plane Through:

1) 75 - 255 Horizontal

Horizontal Cone Through:

2) 65 Vertical

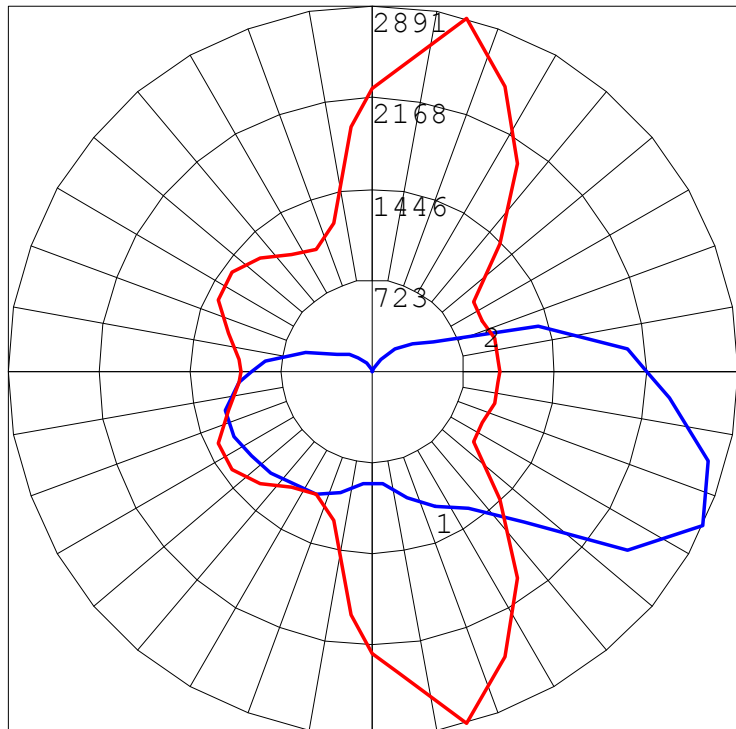



Photometric Report (Type C)

Filename: HAZ121I.ies

Maximum Candela = 2891 at 75 H 65 V

Classification:

Road Classification: Type III, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.25

Luminaire Efficacy Rating (LER): 10609

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	297.8	2.1	2.8
FM (30-60)	1306.2	9.3	12.3
FH (60-80)	1618.2	11.6	15.3
FVH (80-90)	1216.7	8.7	11.5
BL (0-30)	279.3	2.0	2.6
BM (30-60)	1097.3	7.8	10.3
BH (60-80)	1250.0	8.9	11.8
BVH (80-90)	925.1	6.6	8.7
UL (90-100)	606.5	4.3	5.7
UH (100-180)	2011.6	14.4	19.0
Total	10608.7	75.7	100.0
BUG Rating	B3-U5-G5		

