



## Photometric Report (Type C)

Filename: HAZ128I.ies

Maximum Candela = 1459 at 0 H 65 V

### Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.25

Luminaire Efficacy Rating (LER): 10221

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

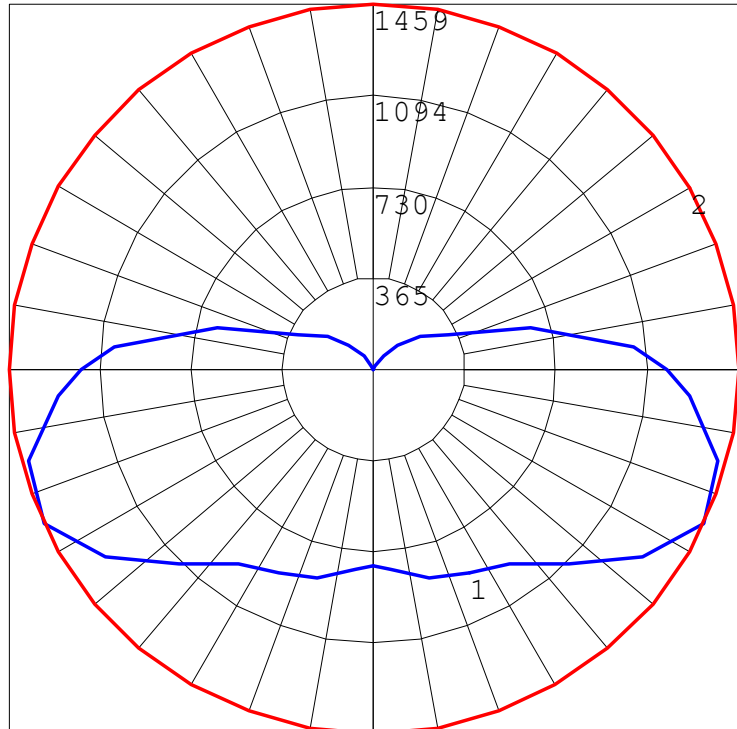



## Photometric Report (Type C)

Filename: HAZ128I.ies

Maximum Candela = 1459 at 0 H 65 V

### Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.25

Luminaire Efficacy Rating (LER): 10221

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	254.3	1.8	2.5
FM (30-60)	1122.8	8.0	11.0
FH (60-80)	1399.9	10.0	13.7
FVH (80-90)	1062.0	7.6	10.4
BL (0-30)	254.3	1.8	2.5
BM (30-60)	1122.8	8.0	11.0
BH (60-80)	1399.9	10.0	13.7
BVH (80-90)	1062.0	7.6	10.4
UL (90-100)	606.8	4.3	5.9
UH (100-180)	1936.6	13.8	18.9
Total	10221.4	72.9	100.0
BUG Rating	B3-U5-G5		

