



Photometric Report (Type C)

Filename: HAZ236I.ies

Maximum Candela = 644 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.20

Luminaire Efficacy Rating (LER): 2935

Indoor Classification: Semi-Direct

BUG Rating : B2-U3-G2


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

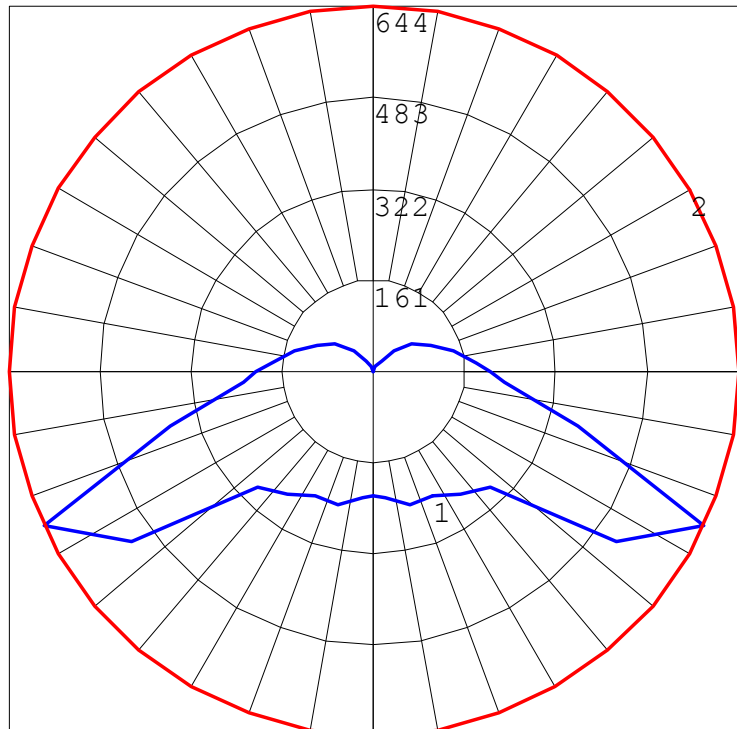



Photometric Report (Type C)

Filename: HAZ236I.ies

Maximum Candela = 644 at 0 H 65 V

Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.20

Luminaire Efficacy Rating (LER): 2935

Indoor Classification: Semi-Direct

BUG Rating : B2-U3-G2

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	70.5	1.8	2.4
FM (30-60)	337.7	8.4	11.5
FH (60-80)	537.9	13.4	18.3
FVH (80-90)	223.0	5.6	7.6
BL (0-30)	70.5	1.8	2.4
BM (30-60)	337.7	8.4	11.5
BH (60-80)	537.9	13.4	18.3
BVH (80-90)	223.0	5.6	7.6
UL (90-100)	106.2	2.7	3.6
UH (100-180)	490.8	12.3	16.7
Total	2935.2	73.4	100.0
BUG Rating	B2-U3-G2		

