



## Photometric Report (Type C)

Filename: HAZ282I.ies

Maximum Candela = 312 at 0 H 35 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 1286

Indoor Classification: Direct

BUG Rating : B1-U1-G1


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 35 Vertical

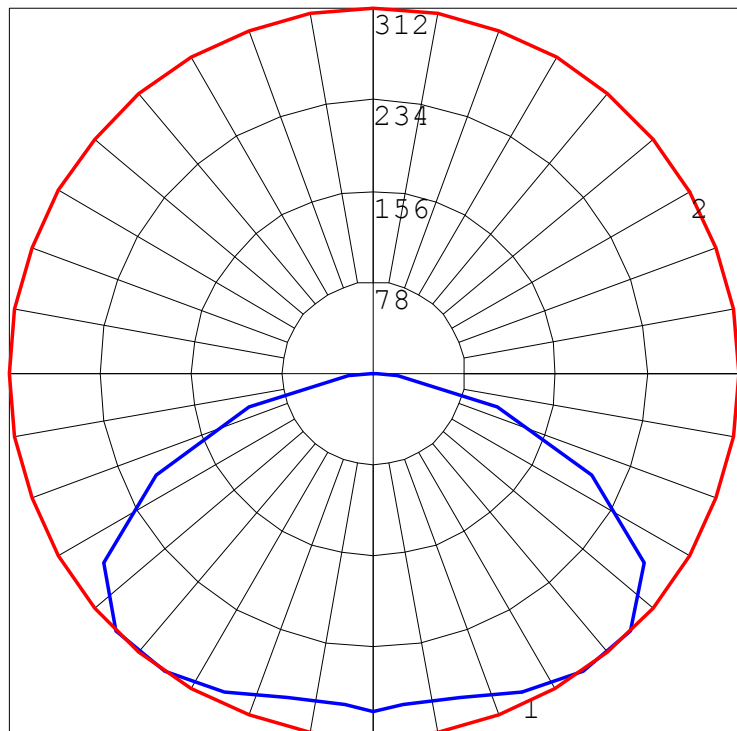



## Photometric Report (Type C)

Filename: HAZ282I.ies

Maximum Candela = 312 at 0 H 35 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 1286

Indoor Classification: Direct

BUG Rating : B1-U1-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	85.8	9.5	6.7
FM (30-60)	318.2	35.4	24.7
FH (60-80)	197.3	21.9	15.3
FVH (80-90)	38.5	4.3	3.0
BL (0-30)	85.8	9.5	6.7
BM (30-60)	318.2	35.4	24.7
BH (60-80)	197.3	21.9	15.3
BVH (80-90)	38.5	4.3	3.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	6.3	0.7	0.5
Total	1285.9	142.9	100.0
BUG Rating	B1-U1-G1		

