



Photometric Report (Type C)

Filename: HAZ366I.ies

Maximum Candela = 5977 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.19

Luminaire Efficacy Rating (LER): 35257

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

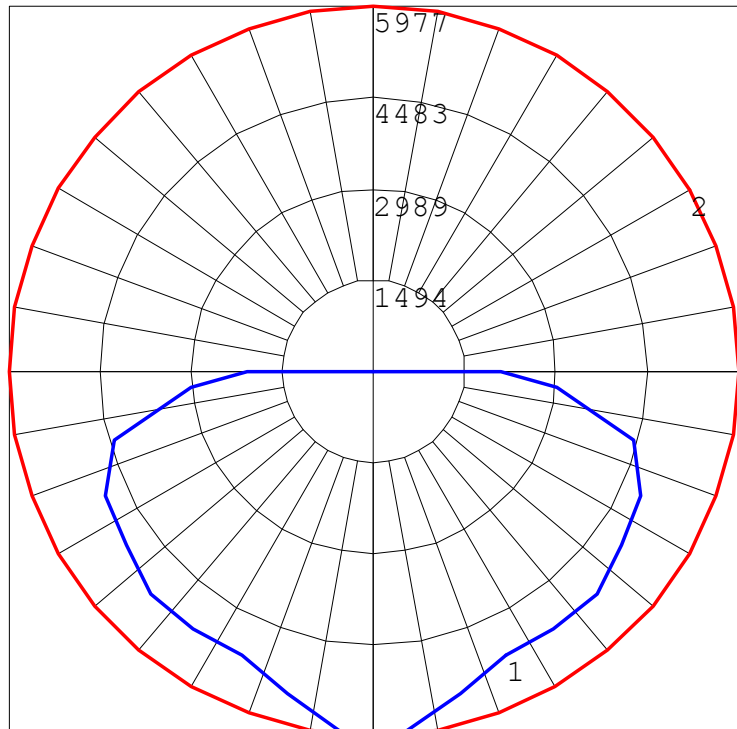



Photometric Report (Type C)

Filename: HAZ366I.ies

Maximum Candela = 5977 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.19

Luminaire Efficacy Rating (LER): 35257

Indoor Classification: Semi-Direct

BUG Rating : B4-U5-G5

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1609.7	4.0	4.6
FM (30-60)	5350.8	13.4	15.2
FH (60-80)	4702.7	11.8	13.3
FVH (80-90)	2697.9	6.7	7.7
BL (0-30)	1609.7	4.0	4.6
BM (30-60)	5350.8	13.4	15.2
BH (60-80)	4702.7	11.8	13.3
BVH (80-90)	2697.9	6.7	7.7
UL (90-100)	0.0	0.0	0.0
UH (100-180)	6534.5	16.3	18.5
Total	35256.7	88.1	100.0
BUG Rating	B4-U5-G5		

