



LE202

LED WET / DAMP LIGHTING

Food & Beverage Processing • Industrial • Pulp & Paper • Shipyards / Marine • Water Treatment

Suitable for interior or exterior applications. This LED, lightweight, vapor tight, **non-metallic fixture** is ideal for corrosive or wet/damp environments. The LE202 fixture features a fiberglass housing with an acrylic frosted or acrylic frosted ribbed lens, a continuous gasket design, and comes standard with surface mount brackets. The LE202 is ideal for commercial industrial or institutional applications providing maximum light output where humidity, dust, or fumes are possible. The LE202 is resilient against corrosion and weathering and is available in **2' and 4'** fixture lengths.



1 SERIES	2 LUMENS	3 CCT	4 VOLTAGE
LE202	38: 42W (3850Lm*) (2 Ft.) 77: 84W (7700Lm*) (4 Ft.) *Nominal Lumens	3: 3500K 4: 4000K 5: 5000K	V1: 120-277V
5 LENGTH	6 LENS	7 MOUNT	8 OPTIONS
2: 2 Ft. 4: 4 Ft.	ARF: Acrylic ribbed frosted lens AF: Acrylic frosted lens	SM: surface mount bracket AM: 45° angle mount	SL: Stainless steel latches EM: Battery/Driver Backup (90 Min.) (4 Ft. only)

CERTIFICATIONS

UL 1598A Marine Inside
CSA 22.2 No. 250.0
UL 8750
CSA 22.2 No. 250.13
NEMA 4X
NSF (enclosure only)
High Pressure tested at 1500psi
-20°C to 35°C Ambient Rating
IP67 - Housing Only

FEATURES

Fiberglass: 5VA UL rated
5 Year Warranty
>50,000 hours

PERFORMANCE

2 Ft.: 42 watts (3850 Lumens) at CCT 5000K
4 Ft.: 84 watts (7700 Lumens) at CCT 5000K
120-277 Volts
0-10V dimming (standard)

OPTICS


Acrylic ribbed frosted lens
Acrylic frosted lens

OPTIONS

45° angle mount bracket
Stainless steel latches
Emergency battery back-up

NOTES

For chemical resistance information please see website

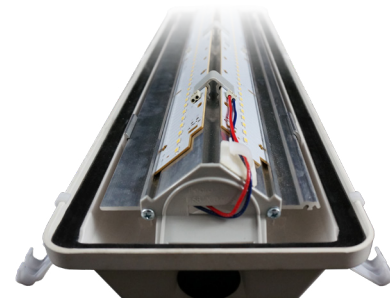


LE202

LED WET / DAMP LIGHTING

Food & Beverage Processing • Industrial • Pulp & Paper • Shipyards / Marine • Water Treatment





DIMENSIONS



ARF: Standard


Acrylic ribbed frosted lens depth: 2.13"
Acrylic frosted lens depth: 3.5"



AF: Acrylic frosted lens

PART #	A	B	C	D
LE202-38	27.25"	4.25"	6.75"	7.33"
LE202-78	51.75"	4.25"	6.75"	7.33"

*"B" measurement: with acrylic ribbed frosted lens is 4.25"
*"B" measurement with acrylic frosted lens is 5.75"



Std. Latch Detail



MOUNTING

- Offers a huge advantage over more traditional enclosures.
- Durable, stainless steel Mounting hardware.
- No drilling necessary for the housing for installation.
- Installation time is dramatically reduced, providing lower installation costs.

STANDARD Mounting BRACKET Kits

Included with each fixture

P/N 6686: Two brackets per kit. 1 kit needed per fixture.




Standard Mounting bracket

OPTIONAL Mounting

45° Mounting bracket kit

P/N 5102 - Kit includes:

- (2) 45° brackets
- (2) 5081 brackets



45° Mounting option